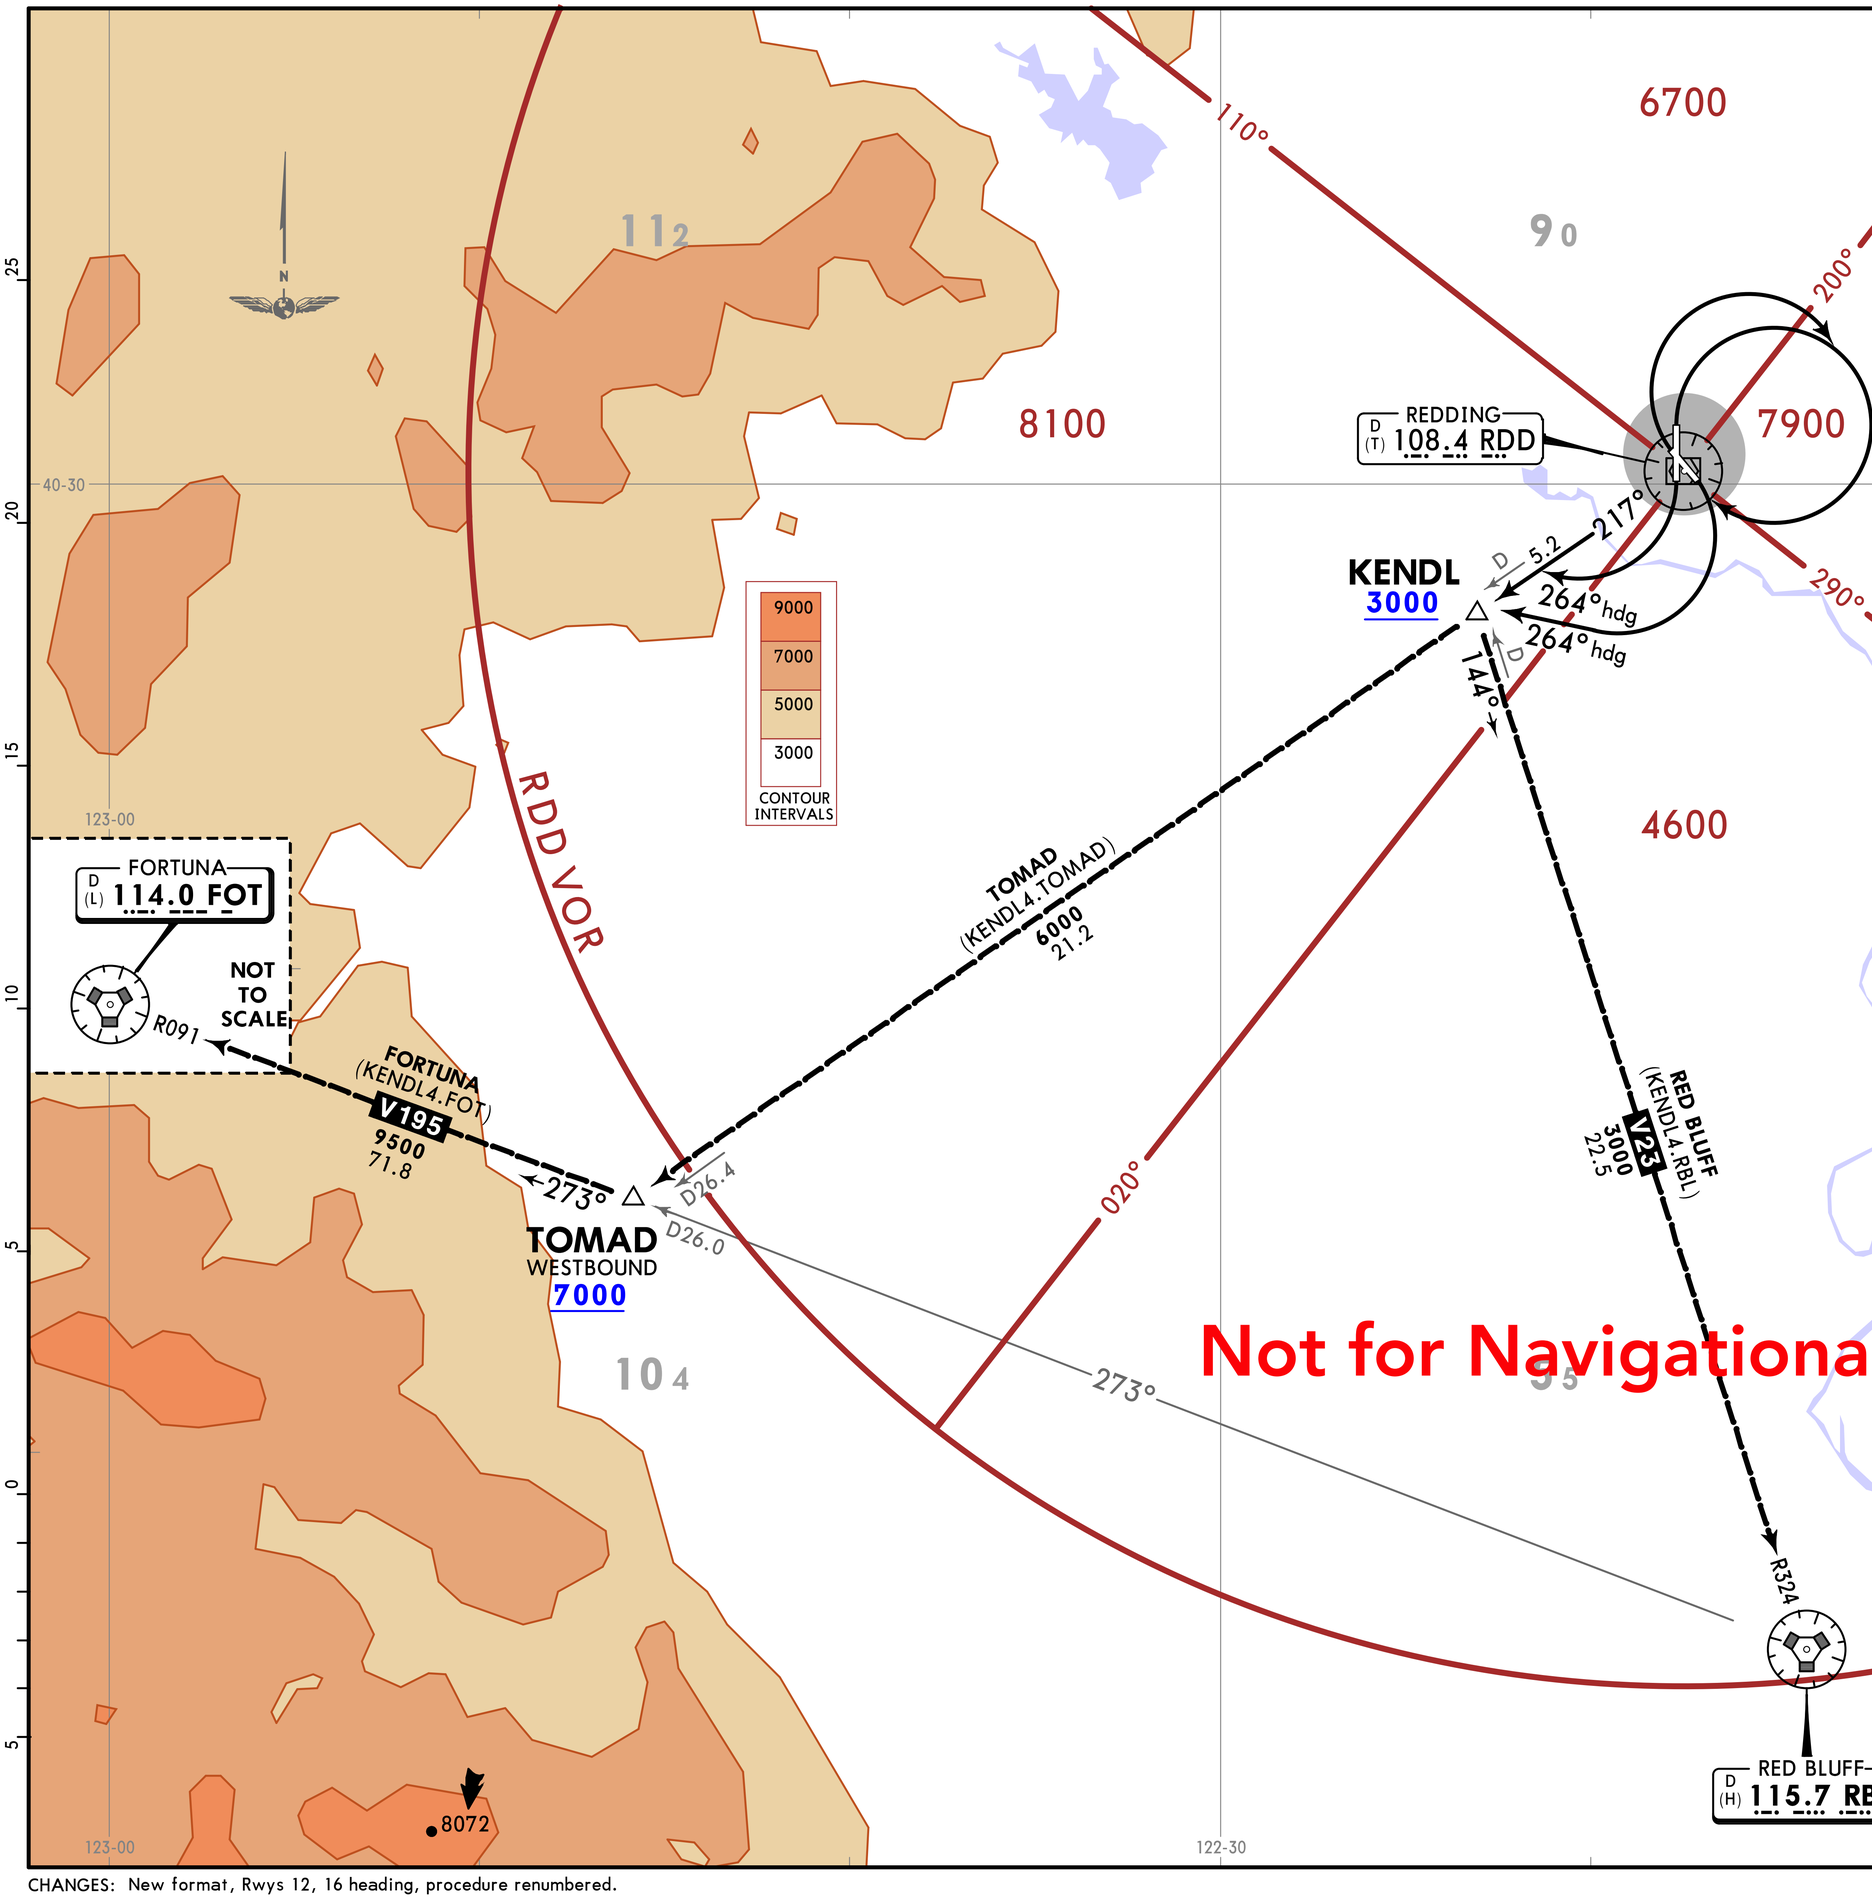

OAKLAND Center (R)	Apt Elev
132.2	505

Trans alt: 18000

KENDL 4 DEPARTURE (KENDL4.KENDL)

This SID requires takeoff minimums (for standard minimums, refer to airport chart):
Rwys 12, 34: Standard (or lower than standard, if authorized) with minimum climb of 410 per NM to 3000.
Rwy 16: Standard (or lower than standard, if authorized) with minimum climb of 495 per NM to 3000.
Rwy 30: Standard (or lower than standard, if authorized) with minimum climb of 440 per NM to 3000.

Gnd speed-KT	75	100	150	200	250	300
410 per NM	513	683	1025	1367	1708	2050
440 per NM	550	733	1100	1467	1833	2200
495 per NM	619	825	1238	1650	2063	2475

TAKEOFF OBSTACLE NOTES
See TAKEOFF OBSTACLE NOTES page (10-3OB1).

RWY	INITIAL CLIMB	TOP ALTITUDE
12, 16	Climbing RIGHT turn heading 264° to intercept RDD R217 to KENDL, cross KENDL at or above 3000.	Assigned by ATC
30, 34	Climbing RIGHT turn direct RDD VOR then on RDD R217 to KENDL, cross KENDL at or above 3000.	

ROUTING

From KENDL, via transition or assigned route.
MAINTAIN ATC assigned altitude.

CHANGES: New format, Rwys 12, 16 heading, procedure renumbered.

© JEPPESEN, 2020. ALL RIGHTS RESERVED.